

TRANSLATION

(1) **Type Examination Certificate**

(2) No. of the Type Examination Certificate: **ZP/B025/18**

(3) Product: **Anchor device type A**  
Type: **Plaket**

(4) Manufacturer: **H.I.T.S NV**

(5) Address: **Vluchtenburgstraat 1a, 2630 Aartselaar, BELGIUM**

(6) The design of this product and any acceptable variation thereto are specified in the schedule to this type examination certificate.

(7) The certification body of DEKRA EXAM GmbH certifies that this product comply with the fundamental requirements of the standard listed under item 8 below. The examination and test results in the test and assessment report PB 17-278.

(8) The requirements of the standard are assured by compliance with

**DIN EN 795:2012**

**DIN CEN/TS 16415:2013**

(9) This Type Examination Certificate relates only to the design, examination and tests of the specified product in accordance to the standard list. Further requirements of the Directive apply to the manufacturing process and supply of this personal protective equipment. These are not covered by this certificate.


(10) This Type Test Certificate is valid until 2023-02-04

DEKRA EXAM GmbH  
Bochum, 2018-02-05

Signed: Wiegand  
Certification body

Signed: Mühlenbruch  
Special services unit

We confirm the correctness of the translation from the German original. In the case of arbitration only the German wording shall be valid and binding.

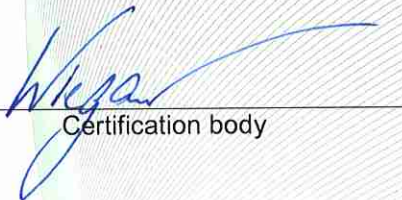  
Certification body

  
Special services unit

## TRANSLATION

- (11) Appendix to
- (12) **Type Examination Certificate**  
**ZP/B025/18**
- (13) 13.1 Subject and Type  
Anchor device type A  
Type: Plaket

### 13.2 Description

The anchor device of type Plaket (Fig. 1) is used to protect people against falls from a height. A maximum number of three people can connect themselves to the anchor point. The corrosion-resistant anchor device is mounted to surfaces of sufficient strength.

The user can use a connector in compliance with EN 362 and his own personal protective equipment to connect to the anchor point and thus protect himself against falls from a height. The anchor device can be loaded in any direction in which a fall indicator is mounted.

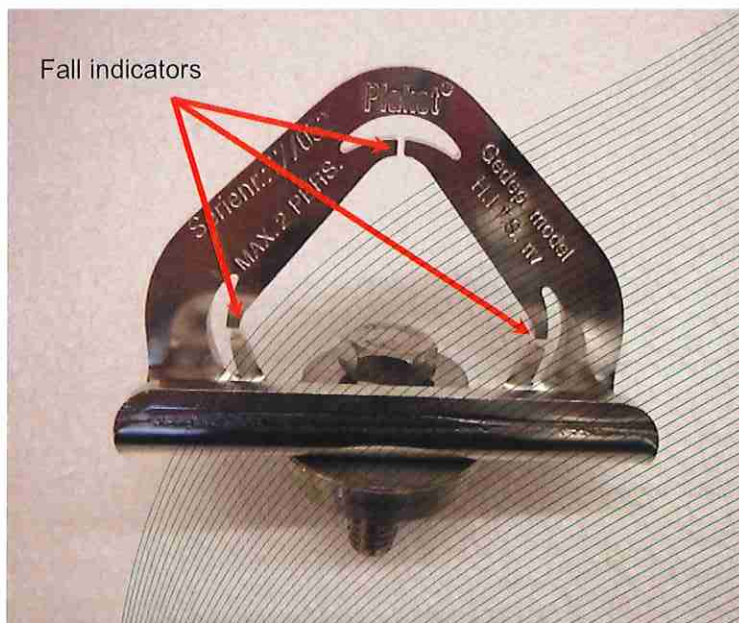


Fig. 1: anchor device type A, type Plaket

- (14) Test and Assessment Report  
PB 17-278, 2018-02-05